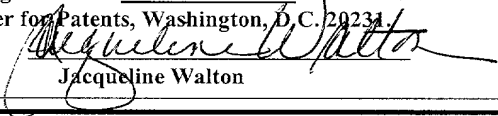


FORM PTO-1390 (Modified) (REV 11-98)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER <b>65243-001</b>	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR) <b>09/743545</b>	
INTERNATIONAL APPLICATION NO. <b>PCT/EP99/05409</b>		INTERNATIONAL FILING DATE <b>28 July 1999 (28.07.99)</b>		PRIORITY DATE CLAIMED <b>31 July 1998 (31.07.98)</b>	
TITLE OF INVENTION <b>DEVICE AND METHOD FOR THE VACUUM PLASMA PROCESSING OF OBJECTS</b>					
APPLICANT(S) FOR DO/EO/US <b>JUNG, Thomas</b>					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information					
<ol style="list-style-type: none"> <li>1. <input checked="" type="checkbox"/> This is a <b>FIRST</b> submission of items concerning a filing under 35 U.S.C. 371.</li> <li>2. <input type="checkbox"/> This is a <b>SECOND</b> or <b>SUBSEQUENT</b> submission of items concerning a filing under 35 U.S.C. 371.</li> <li>3. <input type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).</li> <li>4. <input checked="" type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.</li> <li>5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371 (c) (2)) <ol style="list-style-type: none"> <li>a. <input type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau)</li> <li>b. <input checked="" type="checkbox"/> has been transmitted by the International Bureau.</li> <li>c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).</li> </ol> </li> <li>6. <input checked="" type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)).</li> <li>7. <input checked="" type="checkbox"/> A copy of the International Search Report (PCT/ISA/210).</li> <li>8. <input type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3)) <ol style="list-style-type: none"> <li>a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau)</li> <li>b. <input type="checkbox"/> have been transmitted by the International Bureau.</li> <li>c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</li> <li>d. <input type="checkbox"/> have not been made and will not be made.</li> </ol> </li> <li>9. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).</li> <li>10. <input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).</li> <li>11. <input checked="" type="checkbox"/> A copy of the International Preliminary Examination Report (PCT/IPEA/409)</li> <li>12. <input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).</li> </ol>					
Items 13 to 20 below concern document(s) or information included:					
<ol style="list-style-type: none"> <li>13. <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.</li> <li>14. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included</li> <li>15. <input checked="" type="checkbox"/> A <b>FIRST</b> preliminary amendment.</li> <li>16. <input type="checkbox"/> A <b>SECOND</b> or <b>SUBSEQUENT</b> preliminary amendment.</li> <li>17. <input checked="" type="checkbox"/> A substitute specification.</li> <li>18. <input type="checkbox"/> A change of power of attorney and/or address letter.</li> <li>19. <input checked="" type="checkbox"/> Certificate of Mailing by Express Mail</li> <li>20. <input checked="" type="checkbox"/> Other items or information:</li> </ol>					
Marked up version of the PCT Application with the amendments made as described in the Preliminary Amendment Clean copy of the translated PCT Application incorporating all noted amendments as described in the Preliminary amendment.					
<b>CERTIFICATE OF EXPRESS MAILING</b>					
I hereby certify that the attached documents were deposited with the United States Postal Service "Express Mail Post Office to Addressee" Express Mailing Label No. <u>EL660390525US</u> under 37 CFR 1.10 on <u>January 10, 2001</u> and addressed to <u>BOX PCT, Assistant Commissioner for Patents, Washington, D.C. 20234</u> .					
 Jacqueline Walton					

U.S. APPLICATION NO. (IF KNOWN) SEE 37 CFR

INTERNATIONAL APPLICATION NO.

ATTORNEY'S DOCKET NUMBER

09/743545

PCT/EP99/05409

65243-001

21. The following fees are submitted:

**BASIC NATIONAL FEE ( 37 CFR 1.492 (a) (1) - (5) ) :**

- ☒ Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO . . . . . \$1,000.00
- ☐ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO . . . . . \$860.00
- ☐ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO . . . . . \$710.00
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) . . . . . \$690.00
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) . . . . . \$100.00

**ENTER APPROPRIATE BASIC FEE AMOUNT =**

\$1,000.00

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (e))

\$0.00

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	19 - 20 =	0	x \$18.00
Independent claims	2 - 3 =	0	x \$80.00
Multiple Dependent Claims (check if applicable).			<input type="checkbox"/>

\$0.00

**TOTAL OF ABOVE CALCULATIONS =**

\$1,000.00

Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable).

☐

\$0.00

**SUBTOTAL =**

\$1,000.00

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).

+

\$0.00

**TOTAL NATIONAL FEE =**

\$1,000.00

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable).

☐

\$0.00

**TOTAL FEES ENCLOSED =**

\$1,000.00

Amount to be:

refunded

\$

charged

\$

☒ A check in the amount of \$1,000.00 to cover the above fees is enclosed.

☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \_\_\_\_\_ to cover the above fees.  
A duplicate copy of this sheet is enclosed.

☐ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. **08-2789** A duplicate copy of this sheet is enclosed.

**NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.**

SEND ALL CORRESPONDENCE TO:

Harold W. Milton  
HOWARD & HOWARD ATTORNEYS, P.C.  
39400 Woodward Avenue - Suite 101  
Bloomfield Hills, MI 48304

Telephone: 248-645-1483  
Facsimile: 248-645-1568

SIGNATURE

Harold W. Milton

NAME

22,180

REGISTRATION NUMBER

10 JANUARY 2001

DATE

525 Rec'd PCT/PTO 10 JAN 2001

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In Re Application of: Thomas Jung  
Int'l Serial No: PCT/EP99/05409  
Int'l Filing Date: 28 July 1999  
Attny Docket No: 65,243-001  
Title: DEVICE AND METHOD FOR COATING AND/OR  
SURFACE MODIFICATION OF OBJECTS BY MEANS OF  
A PLASMA

---

**PRELIMINARY AMENDMENT**

Assistant Commissioner for Patents  
Washington, D.C. 20231

**BOX PCT**

Dear Sirs:

Prior to examination of the above-identified application, please amend the claims as follows:

**IN THE SPECIFICATION**

Please amend the specification as follows:

Page 1, before line 4 please insert the following heading - - BACKGROUND OF THE INVENTION- -

Page 1, before line 5 please insert the following heading- -1. Field of the Invention--.

Page 1, before line 15, please insert the following heading - -2. Description of the Prior Art- -

Page 2, before line 5, please insert the following heading - -SUMMARY OF THE INVENTION AND ADVANTAGES- -

Page 2, line 10, please delete "In accordance with the invention, this task is solved by the characteristics of Claim 1 for the device and the characteristics of Claim 11 for the method. Advantageous embodiments and further developments of the invention result from the use of the characteristics indicated in the subordinate claims."

Page 2, line 14, please insert the following - -BRIEF DESCRIPTION OF THE DRAWINGS- -.

Page 2, line 15, please insert the following paragraphs- -Figure 1 shows an example of a device in accordance with the invention with an inserted electrode for plasma generation, and

Figure 2 shows a second example of a device in accordance with the invention with an opening through which microwaves can be directed for plasma generation.- -

Page 2, before line 21 please insert the following heading - -DETAILED DESCRIPTION OF THE INVENTION- -

Page 2, line 22 please insert the following paragraphs- -Figure 1 represents a box structure 1 with rectangular cross section. An end face 8 is formed as an opening through which objects 2 are introduced and can be removed. Opening 8 can, as shown, be reclosed. The operating gas can be introduced into the flat structure 1 through opening 3 and can be removed again through the larger and diametrically oppositely arranged opening 4.

Electrode 5, which is in this case connected as an anode, is inserted via an additional opening 6'. Between anode 5 and the box structure 1 there is insulation, not shown, so that the potentials are separate from one another.

Page 3, line 1 please insert the following paragraphs- -Figure 2 shows as a cylindrical box structure 1 in which several objects 2 are arranged on a support 7 insulated from the box structure 1. The upper face is again formed as a cover 8, which can be removed and reattached.

There is an opening 6 in cover 8, through which microwaves can be directed into the interior of the box structure 1 and a plasma can be generated.

In this example there are two openings 3 in the outer jacket surface, through which operating gas can be introduced into the interior of the box structure 1. The gas can be removed through opening 4, which in this example is combined with a support, from the box structure 1.- -

Page 10, line 15, please delete "The organization of possible examples of a device in accordance with the invention is described in more detail below."

Page 10, line 17, please delete "Here:"

Page 10, line 18, please delete "Figure 1 shows an example of a device in accordance with the invention with an inserted electrode for plasma generation, and

Page 10, line 20 please delete "Figure 2 shows a second example of a device in accordance with the invention with an opening through which microwaves can be directed for plasma generation."

Page 10, line 23, please delete "Figure 1 represents a box structure 1 with rectangular cross section. An end face 8 is formed as an opening through which objects 2 are introduced and can be removed. Opening 8 can, as shown, be recessed. The operating gas can be introduced into the flat structure 1 through opening 3 and can be removed again through the larger and diametrically oppositely arranged opening 4."

Page 10, line 28 please delete "Electrode 5, which is in this case connected as an anode, is inserted via an additional opening 6'. Between anode 5 and the box structure 1 there is insulation, not shown, so that the potentials are separate from one another."

Page 11, line 1 please delete "Figure 2 shows a cylindrical box structure 1, in which again several objects 2 are arranged on a support 7 insulated from the box structure 1. The upper face is again formed as a cover 8, which can be removed and reattached."

Page 11, line 4 please delete "There is an opening 6 in cover 8, through which microwaves can be directed into the interior of the box structure 1 and a plasma can be generated."

Page 11, line 6 please delete "In this example there are two openings 3 in the outer jacket surface, through which operating gas can be introduced into the interior of the box structure 1. The gas can be removed through opening 4, which in this example is combined with a support, from the box structure 1."

### **IN THE SUMMARY**

Please preliminary amend the Summary as follows:

Page 14 line 1, please delete "Summary" and insert - -ABSTRACT OF THE DISCLOSURE- -.

### **IN THE CLAIMS:**

Please preliminary amend the claims as follows:

Claim 4, line 1, after "in" please delete "one of Claims 1-3," and insert - -claim 1- -.

Claim 5, line 1, after "in" please delete "one of Claims 1-4," and insert - -claim 1- -.

Claim 6, line 1, after "in" please delete "one of Claims 1-5," and insert - -claim 1- -.

Claim 7, line 1, after "in" please delete "one of Claims 1-6," and insert - -claim 1- -.

Claim 8, line 1, after "in" please delete "one of Claims 1-7," and insert - -claim 1- -.

Claim 9, line 1, after "in" please delete "one of Claims 1-8," and insert - -claim 1- -.

Claim 9, line 2, after "opening" please cancel "(5)" and insert - -(4)- -.

Claim 10, line 1, after "in" please delete "one of Claims 1-9," and insert - -claim 1- -.

Claim 11, line 2, after "in" please delete "one of Claims 1-10," and insert - -claim 1- -.

Claim 13, line 1, after "in" please delete "Claim 11 or 12", and insert - -claim 11- -.

Claim 14, line 1, after "in" please delete "one of Claims 11-13," and insert - -claim 11- -.

Claim 15, line 1, after "in" please delete "one of Claims 12-14," and insert - -claim 12- -.

Claim 16, line 1, after "in" please delete "one of Claims 12-15," and insert - -claim 12- -.

Claim 17, line 1, after "in" please delete "one of Claims 12-16," and insert - -claim 12- -.

Claim 18, line 1, after "in" please delete "one of Claims 12-17," and insert - -claim 12- -.

Claim 19, line 1, after "in" please delete "one of Claims 11-18," and insert - -claim 11- -.

### **REMARKS**

The specification and claims 1-19 have been amended to conform to United States Practice and to eliminate multiple dependency.

Applicant provides herewith 3 separate versions of the PCT Application. The versions are as follows:

1. Translated PCT Application as originally filed in the European Patent Office
2. Marked up version of the same PCT Application with the amendments made as instructed by this Preliminary Amendment.
3. Clean copy of the PCT Application incorporating all noted amendments, which applicant has recommended through this Preliminary Amendment.

Early and favorable consideration is respectfully solicited.

**Respectfully submitted,**

**HOWARD & HOWARD ATTORNEYS, P.C.**

1-10-01  
**Date**



**Harold W. Milton, Reg. No. 22,180**  
The Pinehurst Office Center, Suite #101  
39400 Woodward Avenue  
Bloomfield Hills, MI 48304-5151  
Phone: (248) 723-0352

**Enclosures**

HWM/alw  
G:\P\Pfenning\Ip00001\Patent\Preliminary Amendment.doc

Clean copy of substitute specification and claim.

-1-

## **DEVICE AND METHOD FOR COATING AND/OR SURFACE MODIFICATION OF OBJECTS IN A VACUUM BY MEANS OF A PLASMA**

### **BACKGROUND OF THE INVENTION**

5

#### **1. Field of the Invention**

The invention concerns a device and a method for coating and/or surface modification of objects in a vacuum using a plasma, in which there is the possibility of coating or modifying variform objects on all sides without a large expenditure for plant and process engineering being required. Besides coating or modification, it is also easily possible to conduct cleaning, etching and/or activation to improve, for example, the adhesion of coatings that may be subsequently applied.

Besides the modification of regions of objects that are close to the surface it is also possible by means of the invention to apply particularly microscopically dense metal coatings or compound layers that have low roughness.

15

#### **2. Description of the Prior Art**

The deposition of coatings on objects using a planar direct current magnetron is known from G. Kienel, Vacuum Coating [in German], Volume 2, VDI Verlag GmbH, Düsseldorf, 1993, pp. 160-161.

Such a solution, however, enables the coating of objects that is to be carried out spatially in three dimensions only if the objects are moved at the same time, which can be realized only with great difficulty and at great costs, if at all, especially in the vacuum chambers that are required for this. If such objects have undercut areas, these normally cannot be coated.

In addition, harmful effects from residual gases have to be avoided by producing a high vacuum, which either greatly increases the time needed to produce the vacuum, or requires costly vacuum locks or costly high vacuum pumps.

Another disadvantage is that larger surfaces are parasitically coated, which leads to high losses of the coating material, which has an adverse effect in particular for expensive coating materials such as noble metals. In addition, costs for cleaning are higher because of the parasitic coatings in the chamber and the elements found there.



The amount of coating material that can be applied to the corresponding objects is correspondingly limited, so that a relatively frequent interruption of the coating process is necessary for the necessary changeover of the target.

## 5 SUMMARY OF THE INVENTION AND ADVANTAGES

Thus, it is a task of the invention to propose a device and a corresponding method with which surface modification and/or coating of objects of quite various designs on all sides and optionally even on undercut surface regions can be achieved at low cost for plant engineering process engineering and other expenses.

## 10 BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows an example of a device in accordance with the invention with an inserted electrode for plasma generation, and

Figure 2 shows a second example of a device in accordance with the invention with an opening through which microwaves can be directed for plasma generation.

## 15 DETAILED DESCRIPTION OF THE INVENTION

Figure 1 represents a box structure 1 with rectangular cross section. An end face 8 is formed as an opening through which objects 2 are introduced and can be removed. Opening 8 can, as shown, be reclosed. The operating gas can be introduced into the flat structure 1 through opening 3 and can be removed again through the larger and diametrically oppositely arranged opening 4.

Electrode 5, which is in this case connected as an anode, is inserted via an additional opening 6'. Between anode 5 and the box structure 1 there is insulation, not shown, so that the potentials are separate from one another.

Figure 2 shows as a cylindrical box structure 1, in which several objects 2 are arranged on a support 7 insulated from the box structure 1. The upper face is again formed as a cover 8, which can be removed and reattached.

There is an opening 6 in cover 8, through which microwaves can be directed into the interior of the box structure 1 and a plasma can be generated.

In this example there are two openings 3 in the outer jacket surface, through which operating gas can be introduced into the interior of the box structure 1. The gas can be removed through opening 4, which in this example is combined with a support, from the box structure 1.

5           The device in accordance with the invention can correspondingly be modified for the coating, already mentioned at the start in the description, of objects with metals, metal alloys or various metal compounds like metal nitrides or metal oxides or alternatively and cumulatively for this on the surfaces, so that, for example, the adhesion properties of coatings that are to be applied later can be  
10 improved. Here a box structure, which can have, for example, the form of a rectangle, cube or cylinder of an electrically conductive material is used. The box structure can, by itself, represent a vacuum chamber, which is used by connecting the appropriate pumps and valves in combination, with the technical elements to be used subsequently. However, there is also the possibility of inserting such a box  
15 structure into a traditional vacuum chamber and operating there in accordance with the invention.

          The objects that are to be coated or modified are inserted into the box structure, namely so that direct contact between the objects and the inner wall is avoided and, apart from that, an electrical insulation is used as support for the  
20 objects. The objects can be inserted into the box structure preferably via various openings, so that the objects are surrounded on all sides. The box structure can, however, also consist of two parts, with one part forming a cover that can be positioned on the lower part.

          At least the inner wall should consist of a material that is suitable for the  
25 coating. Of course, it is also possible for the entire box structure to be formed from a material suitable for the coating or for flat targets of a coating material to be arranged on the inner walls of the box structure.

          In addition, openings for feed and withdrawal of the working gas as well as at least one opening through which the energy to produce a glow discharge can be  
30 introduced into the box structure are necessary.

For the modification or coating the box structure is charged to an electrically negative potential with respect to the plasma generated with the glow discharge.

The plasma generation that is brought about by a glow discharge can take place in various ways. For this there is on the one hand the possibility of inserting an electrode through an opening into the interior of the box structure and supplying direct or alternating current to the electrode. If direct current is supplied, the electrode is connected as the anode. The correspondingly supplied alternating current can be low frequency, medium frequency or high frequency.

Another possibility for generating the plasma is to direct microwaves through an opening into the interior of the box structure and thus to generate the plasma.

Since the box structure has a negative electrical potential compared to the plasma, material can be stripped at the inner surface through the appearance of high energy positive ions from the plasma (cathode sputtering), and this material is then deposited on the objects. However, a sufficient difference of potential must be established for this. If an appropriate potential difference has not been reached, no or nearly no material will be stripped away and there will only be a modification in the subsurface region of the objects held in the box structure. The objects can consist of quite various materials such as metal, plastic or ceramic.

By simply increasing the difference of potentials between the box structure and the plasma it is possible to initiate coating of the objects, in addition to modification. Through the appropriate stripping of material at all inner walls of the box structure coating of any three dimensionally shaped object on all sides is possible without additional manipulation of the objects and it is also possible to coat undercut regions, with increased working pressure, which leads to dispersed distribution of the stripped material components, having a favorable effect. Thus, uniform and nearly simultaneous modification and/or coating of objects can be achieved.

The coating material that is not directly deposited on the surface of the object is essentially redeposited on the inner surface of the box structure and thus is not lost to the coating process. Since dispersed coatings are deposited only on relatively

small internal fittings in the box structure such as, for example, the support on which the objects are held, the cleaning cost is reduced considerably compared to the traditional solutions.

5 The adsorbate layers that, as is well known, form in such processes and have an adverse effect on the quality of the layer and layer adhesion in vacuum coating processes through their desorption during coating can be counteracted very effectively through ion bombardment removal. For this the interior of the box structure can be cleaned relatively shortly before the actual coating with a low plasma power, low negative potential on the box structure and/or by providing an  
10 elevated operating pressure, so that no additional technical requirements have to be met to remove the adsorbate layers and the adsorbate after being separated can easily be drawn out with the operating gas.

With the device in accordance with the invention there is also the possibility of already removing a large proportion of the adsorbate layers before initiating the  
15 glow discharge and plasma generation with the introduction and evacuation of a clean dry operating gas during the evacuation phase. Relatively little operating gas is needed for this, since the box structure and its inner surface can be relatively small compared to the inner surface of the traditional vacuum coating chambers, for equal volumes of objects that are to be coated.

20 Through the ion bombardment the inner surface of the box structure can be heated in a simple manner and way and without additional technical cost, so that the desorption of the adsorbate layers can be considerably accelerated.

If the box structure is used in a larger vacuum chamber and accordingly does not itself act as a vacuum chamber, there still remains the effect that the gas flow in  
25 the box structure cannot force any desorbable gases from the walls of the larger vacuum chamber into the box structure due to the relatively small free cross section of its openings.

Since the cleaning of adsorbate layers by ion bombardment and gas flow in the interior space of the box structure is very effective, and the necessary operating  
30 pressure during the actual coating lies in the range of a coarse/fine vacuum, a high vacuum pump with the correspondingly high cost is not necessary.

Compared to the known solution of coating with magnetron sources, the solution in accordance with the invention offers another advantage, which is that considerably more coating material is available than is the case with the targets that are used in the known solution. Since the entire inner surface of the box shaped material consists of coating material, or appropriately dimensioned flat targets of such a coating material are arranged there, the stock of coating material is considerably larger and the process has to be interrupted correspondingly less often for recharging with coating material. In addition, the plasma parameters do not unduly change even when severe stripping of coating material has occurred. In addition, there is no limitation due to thermal resistance caused by a great target thickness.

The box structure can, in combination with the pressure of the operating gas, be dimensioned so that the discharge produced as a consequence of the introduced energy has the character of a hollow cathode glow discharge, so that a particularly high plasma density and accordingly a high coating rate can be achieved without expensive permanent magnets being necessary, as is the case with magnetrons. Here the condition  $\text{pressure} \cdot \text{tube inside diameter} = 133.3 \text{ Pa} \cdot \text{cm}$  with a tolerance range of a maximum of  $13.33\text{--}133.3 \text{ Pa} \cdot \text{cm}$  that was mentioned by M. v. Ardenne in Effects of Physics [in German], Verlag Harry Deutsch, Thun, Frankfurt/Main, 1990, can be correspondingly taken into consideration for the development of a hollow cathode discharge when the relevant clear width of the box structure is used for the tube inside diameter.

Since in accordance with the invention modification and coating can be carried out at relatively low temperatures, there is also the possibility, and this has a very favorable effect, that the box structure can be provided with cooling, preferably water cooling.

As already noted, the difference of potentials between the generated plasma and the box structure can be specifically affected and can be established in the range between 100 to 1000 V. Here the smaller voltage values are sufficient for modification and the higher voltage values are necessary for applying a coating.

The pressure in the box structure can be specifically established in the range between  $10^{-3}$  to 10 mbar.

The opening for withdrawal of the operating gas has a size between a few  $\text{cm}^2$  up to about  $100 \text{ cm}^2$  and it is a good idea to dimension the other openings in the box structure so that their sum is less than the size of the withdrawal opening.

The box structure can have a clear width in the range between 1 cm and 1 m and should have a size at least 1.2 times that of the objects and should be a maximum of 10 times as large as the objects. The objects that are to be modified or coated should fill the interior of the box structure to a volume of about 0.1% to 30%. The objects in the box structure should be electrically isolated from the structure, for example on one or more supports, and should have a distance of at least 0.1 to a maximum of 10 cm from the inner wall of the box structure.

Various metals can be used, for example, aluminum, titanium, or alloys of these. However, it is also possible to use metal compounds such as titanium nitride or indium-tin oxide.

The operating gas, especially for flushing and cleaning, can be a clean dry inert gas, for example argon. However, an operating gas mixture of an inert gas and a reactive gas can be used for coating. One such operating gas is, for example, argon and nitrogen, so that nitride layers can be deposited on the objects.

The gas flow can be adjusted to a minimum of  $10 \text{ cm}^3/\text{min}[\text{STP}]$  (cubic centimeters per minute at standard temperature and pressure) and a maximum of  $1000 \text{ cm}^3/\text{min}[\text{STP}]$ .

If only a very small coating or no coating at all is intended to be applied, the potential difference between the plasma and the box structure should be set to be under 200 V and/or the pressure should be increased by at least a factor of three. With adjustment of this kind a surface modification, as already noted in general, can be carried out.

The device in accordance with the invention can also be used to produce composite structures. For this it is provided that a solid powder is supplied through one of the openings that are present or through an opening specifically made for this. It is also possible to place the solid powder in the device in a container. The particles

of the solid powder preferably have a size from  $10^{-4}$  to  $10^{-9}$  m. Basically all known hard materials are possibilities as solid particles. Examples are high-melting metal oxides like corundum or titanium oxide. Diamond graphite or nitrides can also be used. In accordance with the method, when the powder is introduced via an opening,  
5 it is mixed into the inert gas stream. If the powder is supplied in a container, automatic turbulent mixing takes place due to the applied vacuum. The particles are then deposited on the surface that is to be coated.

The mode of operation in accordance with the invention will be described first below, in general form and then in more detail using two specific examples.

10 After putting the objects in the box structure, the box structure or the surrounding vacuum chamber is evacuated out by means of a vacuum pump and at the same time or shortly afterwards flushing with the operating gas is carried out.

If a sufficiently low pressure (1-10 mbar) has been achieved, the box structure is charged to a negative potential with respect to the plasma and the glow  
15 discharge is initiated by the supply of energy. The ion-supported desorption of the adsorbate layers takes place by means of this.

After sufficient cleaning the pressure is reduced to a pressure in the range between 0.001 and 1 mbar by reducing the feed of operating gas and the potential difference between the box structure and the plasma is increased. This can take  
20 place, for example, by increasing the negative potential, thus a higher negative voltage is supplied to the box structure. Due to this, material of the coating material is stripped from the inner wall of the flat structure and the objects in the structure are correspondingly coated. In each case according to the coating to be applied a pure inert gas or an inert gas-reactive gas mixture can be used as the operating gas. The  
25 fraction of reactive gas, however, must be established in correspondence with the desired layer structure.

Then the glow discharge can be switched off, the supply of operating gas in the pump disconnected and the vacuum chamber or the box structure flooded and after opening the box the modified or coated objects are removed.

The following Examples 1 and 2 are intended to describe on the one hand coating of objects with copper and on the other coating with titanium nitride in more specific detail.

5        Example 1

The objects are put into the box structure, which is shaped as a tube, is situated in a vacuum vessel, and consists of block copper. For evacuation of the vacuum vessel the vacuum pump is connected. At the same time flushing with argon at about  $100 \text{ cm}^3/\text{min}[\text{STP}]$  is carried out.

10        Upon reaching a pressure of 5 mbar the box structure is charged to a negative potential of 300 V compared to a rod shaped anode inserted into the box structure and the glow discharge is initiated. This causes the ion-supported desorption of the adsorbate layers from the inner wall of the box structure.

15        After sufficient cleaning the pressure is reduced to the operating pressure of 0.5 mbar by reducing the feed of gas and the potential of the box structure is set to – 500 V, so that coating of the objects with copper takes place.

20        After 10 min coating time the glow discharge is switched off by disconnecting the supply of current and the argon supply is turned off. The pump is disconnected and the box structure is aerated. The vacuum vessel and box structure are opened and the coated objects are removed.

Example 2

25        The objects are put into the box structure. The box has the shape of a rectangular parallelepiped, consists of aluminum and is itself the vacuum vessel, which is coated nearly completely on its inside with titanium sheets ("targets"). The box structure has a short tubular stub in its wall, to which a microwave source is connected.

30        The vacuum pump is switched on for evacuation of the box. Shortly after that argon is supplied for flushing at about  $300 \text{ cm}^3/\text{min}[\text{STP}]$ . Upon reaching a pressure of 10 mbar the box structure is charged to a negative potential of 250 V and the glow discharge is initiated by turning on the microwave source.



After 3 min cleaning the pressure is reduced to 0.3 mbar by reducing the gas supply, and the objects are supplied with a potential of  $-500$  V, through which surface cleaning takes place. Then 10% nitrogen is added to the argon and the potential of the box structure is set to  $-600$  V, so that coating of the objects with titanium nitride takes place.

After 15 min of coating the glow discharge is turned off and the operating gas supply stopped. The pump is isolated by a valve and the box is aerated. The box is opened and the objects are removed.

Claims

1. A device for coating and/or surface modification of objects in a vacuum, by means of a plasma, which is characterized by the fact that a box structure (1) of an electrically conductive material forms a vacuum chamber or can  
5 be inserted into a vacuum chamber, into which objects (2) are inserted into the box structure (1) through at least one closable opening (8) at a distance from the inner wall, at least one opening (3) for supply and at least one opening (4) for removal of operating gas and an opening (6,6') for introduction of energy for generation of a glow discharge are present, and the box structure (1) has a potential that is  
10 electrically negative with respect to the plasma generated by the glow discharge.

2. A device as in claim 1, which is characterized by the fact that an electrode (5), to which a DC or AC voltage is applied for plasma generation, is inserted into the box structure (1) through an opening (6').  
15

3. A device as in claim 1, which is characterized by the fact that microwaves for plasma generation are directed into the interior of the box structure through opening (6).  
20

4. A device as in claim 1, which is characterized by the fact that the objects (2) are arranged in electrically isolated fashion from the box structure (1).  
25

5. A device as in claim 1, which is characterized by the fact that the objects (2) are supplied with a settable electrical potential.  
30

6. A device claim 1, which is characterized by the fact that the inner wall of the box structure (1) or the box structure (1) is formed of a coating material or is arranged there as a flat target.

7. A device as in claim 1, which is characterized by the fact that the box structure (1) is cooled.

8. A device as in claim 1, which is characterized by the fact that the clear width of the box structure (1) is at least 1.2 times that of the objects (2) and the objects (2) fill the space available in the box structure (1) to a percentage of 0.1% to 30%.

5

9. A device as in claim 1, which is characterized by the fact that the size of the withdrawal opening (4) is larger than the sum of the larger of the other openings (3,6,6') of the box structure (1).

10

10. A device as in claim 1, which is characterized by the fact that the box structure (1) or its inner surface consists of a metal, a metal alloy or a metal compound.

15

11. A method for coating and/or modification of the surfaces of objects with a device as in claim 1, which is characterized by the fact that after evacuation to a sufficiently low pressure and flushing with an operating gas a plasma is generated in the box structure (1), where the plasma power and the negative potential of the box structure (1) are set so that modification of the surface and/or, through material stripping from the inner wall of the box structure (1), coating of the surface of the object (2) is carried out.

20

25

12. A method as in claim 11, which is characterized by the fact that before modification or coating an ion-supported desorption of deposited adsorbate layers is carried out with applied negative potential applied to the box structure (1) and glow discharge initiated.

13. A method as in claim 11, which is characterized by the fact that reactive gas is supplied during the coating.

14. A method as in claim 11, which is characterized by the fact that solid powder is introduced into the box structure and/or is made available in a container arranged there and the solid powder is deposited on the surface (2) of the objects.

5 15. A method as in claim 12, which is characterized by the fact that the potential difference between the box structure (1) and the plasma is set in the range between 100-1000 V.

10 16. A method as in claim 12, which is characterized by the fact that the operating gas is adjusted to a volume flow of 10-1000 cm<sup>3</sup>/min[STP].



15 17. A method as in claim 12, which is characterized by the fact that for surface modification the potential difference between the plasma and the box structure (1) is adjusted to less than 200 V and/or the pressure is increased by at least threefold.

18. A method as in claim 12, which is characterized by the fact that a hollow cathode flow discharge is formed in the box structure (1).

20 19. A method as in claim 11, which is characterized by the fact that an inner gas, reactive gas or a mixture of inert and reactive gas is introduced in a timewise defined fashion as the working gas into the box structure (1).

### ABSTRACT OF THE DISCLOSURE

The invention concerns a device and a method for coating and/or surface modification of objects in a vacuum using a plasma, where there is the possibility of coating or modifying variform objects on all sides without a large expense for plant or process engineering being necessary. In accordance with the invention, a box structure (1) of an electrically conductive material that forms a vacuum chamber or can be inserted into a vacuum chamber is used. Objects (2) can be introduced into the box structure to at least one closable opening (8) at a distance from the inner wall. In addition, there are at least one opening (3) for supply and at least one opening (4) for removal of the operating gas as well as one opening (6,6') for introduction of energy for generation of a glow discharge and the box structure (1) has a potential that is electrically negative with respect to the plasma generated by the glow discharge.

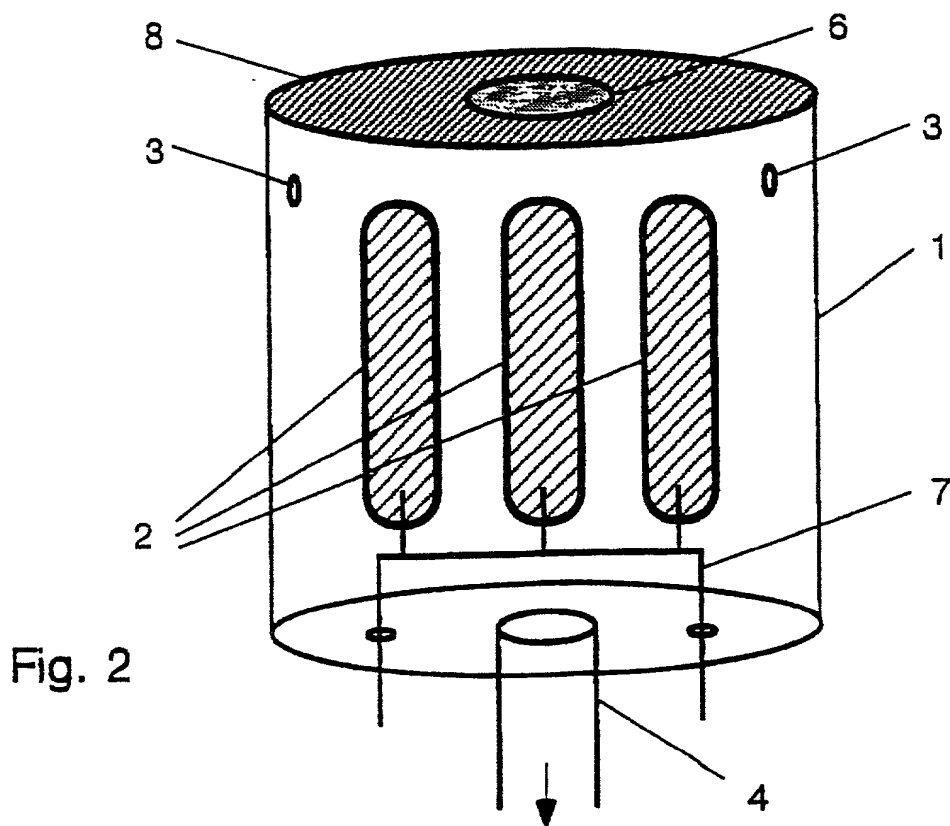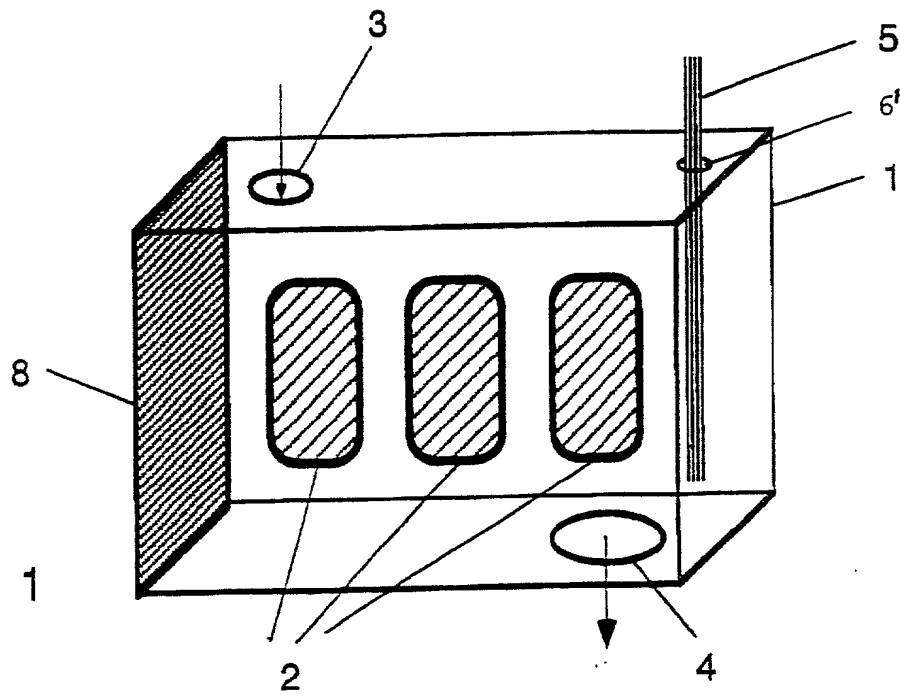

Translation of Original Application

-1-

**DEVICE AND METHOD FOR COATING AND/OR SURFACE  
MODIFICATION OF OBJECTS IN A VACUUM BY MEANS OF A PLASMA**

The invention concerns a device and a method for coating and/or surface  
5 modification of objects in a vacuum using a plasma, in which there is the possibility  
of coating or modifying variform objects on all sides without a large expenditure for  
plant and process engineering being required. Besides coating or modification, it is  
also easily possible to conduct cleaning, etching and/or activation to improve, for  
example, the adhesion of coatings that may be subsequently applied.

10 Besides the modification of regions of objects that are close to the surface it  
is also possible by means of the invention to apply particularly microscopically  
dense metal coatings or compound layers that have low roughness.

The deposition of coatings on objects using a planar direct current magnetron  
is known from G. Kienel, Vacuum Coating [in German], Volume 2, VDI Verlag  
15 GmbH, Düsseldorf, 1993, pp. 160-161.

Such a solution, however, enables the coating of objects that is to be carried  
out spatially in three dimensions only if the objects are moved at the same time,  
which can be realized only with great difficulty and at great costs, if at all, especially  
in the vacuum chambers that are required for this. If such objects have undercut  
20 areas, these normally cannot be coated.

In addition, harmful effects from residual gases have to be avoided by  
producing a high vacuum, which either greatly increases the time needed to produce  
the vacuum, or requires costly vacuum locks or costly high vacuum pumps.

Another disadvantage is that larger surfaces are parasitically coated, which  
25 leads to high losses of the coating material, which has an adverse effect in particular  
for expensive coating materials such as noble metals. In addition, costs for cleaning  
are higher because of the parasitic coatings in the chamber and the elements found  
there.

The amount of coating material that can be applied to the corresponding  
30 objects is correspondingly limited, so that a relatively frequent interruption of the  
coating process is necessary for the necessary changeover of the target.

Thus, it is a task of the invention to propose a device and a corresponding method with which surface modification and/or coating of objects of quite various designs on all sides and optionally even on undercut surface regions can be achieved at low cost for plant engineering process engineering and other expenses.

5 In accordance with the invention, this task is solved by the characteristics of Claim 1 for the device and the characteristics of Claim 11 for the method. Advantageous embodiments and further developments of the invention result from the use of the characteristics indicated in the subordinate claims.

10 The device in accordance with the invention can correspondingly be modified for the coating, already mentioned at the start in the description, of objects with metals, metal alloys or various metal compounds like metal nitrides or metal oxides or alternatively and cumulatively for this on the surfaces, so that, for example, the adhesion properties of coatings that are to be applied later can be improved. Here a box structure, which can have, for example, the form of a  
15 rectangle, cube or cylinder of an electrically conductive material is used. The box structure can, by itself, represent a vacuum chamber, which is used by connecting the appropriate pumps and valves in combination, with the technical elements to be used subsequently. However, there is also the possibility of inserting such a box structure into a traditional vacuum chamber and operating there in accordance with  
20 the invention.

The objects that are to be coated or modified are inserted into the box structure, namely so that direct contact between the objects and the inner wall is avoided and, apart from that, an electrical insulation is used as support for the objects. The objects can be inserted into the box structure preferably via various  
25 openings, so that the objects are surrounded on all sides. The box structure can, however, also consist of two parts, with one part forming a cover that can be positioned on the lower part.

At least the inner wall should consist of a material that is suitable for the coating. Of course, it is also possible for the entire box structure to be formed from a  
30 material suitable for the coating or for flat targets of a coating material to be arranged on the inner walls of the box structure.



In addition, openings for feed and withdrawal of the working gas as well as at least one opening through which the energy to produce a glow discharge can be introduced into the box structure are necessary.

For the modification or coating the box structure is charged to an electrically negative potential with respect to the plasma generated with the glow discharge.

The plasma generation that is brought about by a glow discharge can take place in various ways. For this there is on the one hand the possibility of inserting an electrode through an opening into the interior of the box structure and supplying direct or alternating current to the electrode. If direct current is supplied, the electrode is connected as the anode. The correspondingly supplied alternating current can be low frequency, medium frequency or high frequency.

Another possibility for generating the plasma is to direct microwaves through an opening into the interior of the box structure and thus to generate the plasma.

Since the box structure has a negative electrical potential compared to the plasma, material can be stripped at the inner surface through the appearance of high energy positive ions from the plasma (cathode sputtering), and this material is then deposited on the objects. However, a sufficient difference of potential must be established for this. If an appropriate potential difference has not been reached, no or nearly no material will be stripped away and there will only be a modification in the subsurface region of the objects held in the box structure. The objects can consist of quite various materials such as metal, plastic or ceramic.

By simply increasing the difference of potentials between the box structure and the plasma it is possible to initiate coating of the objects, in addition to modification. Through the appropriate stripping of material at all inner walls of the box structure coating of any three dimensionally shaped object on all sides is possible without additional manipulation of the objects and it is also possible to coat undercut regions, with increased working pressure, which leads to dispersed distribution of the stripped material components, having a favorable effect. Thus, uniform and nearly simultaneous modification and/or coating of objects can be achieved.

The coating material that is not directly deposited on the surface of the object is essentially redeposited on the inner surface of the box structure and thus is not lost to the coating process. Since dispersed coatings are deposited only on relatively small internal fittings in the box structure such as, for example, the support on which the objects are held, the cleaning cost is reduced considerably compared to the traditional solutions.

The adsorbate layers that, as is well known, form in such processes and have an adverse effect on the quality of the layer and layer adhesion in vacuum coating processes through their desorption during coating can be counteracted very effectively through ion bombardment removal. For this the interior of the box structure can be cleaned relatively shortly before the actual coating with a low plasma power, low negative potential on the box structure and/or by providing an elevated operating pressure, so that no additional technical requirements have to be met to remove the adsorbate layers and the adsorbate after being separated can easily be drawn out with the operating gas.

With the device in accordance with the invention there is also the possibility of already removing a large proportion of the adsorbate layers before initiating the glow discharge and plasma generation with the introduction and evacuation of a clean dry operating gas during the evacuation phase. Relatively little operating gas is needed for this, since the box structure and its inner surface can be relatively small compared to the inner surface of the traditional vacuum coating chambers, for equal volumes of objects that are to be coated.

Through the ion bombardment the inner surface of the box structure can be heated in a simple manner and way and without additional technical cost, so that the desorption of the adsorbate layers can be considerably accelerated.

If the box structure is used in a larger vacuum chamber and accordingly does not itself act as a vacuum chamber, there still remains the effect that the gas flow in the box structure cannot force any desorbable gases from the walls of the larger vacuum chamber into the box structure due to the relatively small free cross section of its openings.

Since the cleaning of adsorbate layers by ion bombardment and gas flow in the interior space of the box structure is very effective, and the necessary operating pressure during the actual coating lies in the range of a coarse/fine vacuum, a high vacuum pump with the correspondingly high cost is not necessary.

5 Compared to the known solution of coating with magnetron sources, the solution in accordance with the invention offers another advantage, which is that considerably more coating material is available than is the case with the targets that are used in the known solution. Since the entire inner surface of the box shaped material consists of coating material, or appropriately dimensioned flat targets of  
10 such a coating material are arranged there, the stock of coating material is considerably larger and the process has to be interrupted correspondingly less often for recharging with coating material. In addition, the plasma parameters do not unduly change even when severe stripping of coating material has occurred. In addition, there is no limitation due to thermal resistance caused by a great target  
15 thickness.

The box structure can, in combination with the pressure of the operating gas, be dimensioned so that the discharge produced as a consequence of the introduced energy has the character of a hollow cathode glow discharge, so that a particularly high plasma density and accordingly a high coating rate can be achieved without  
20 expensive permanent magnets being necessary, as is the case with magnetrons. Here the condition  $\text{pressure} \cdot \text{tube inside diameter} = 133.3 \text{ Pa} \cdot \text{cm}$  with a tolerance range of a maximum of  $13.33\text{-}133.3 \text{ Pa} \cdot \text{cm}$  that was mentioned by M. v. Ardenne in Effects of Physics [in German], Verlag Harry Deutsch, Thun, Frankfurt/Main, 1990, can be correspondingly taken into consideration for the development of a hollow cathode  
25 discharge when the relevant clear width of the box structure is used for the tube inside diameter.

Since in accordance with the invention modification and coating can be carried out at relatively low temperatures, there is also the possibility, and this has a very favorable effect, that the box structure can be provided with cooling, preferably  
30 water cooling.

As already noted, the difference of potentials between the generated plasma and the box structure can be specifically affected and can be established in the range between 100 to 1000 V. Here the smaller voltage values are sufficient for modification and the higher voltage values are necessary for applying a coating.

- 5           The pressure in the box structure can be specifically established in the range between  $10^{-3}$  to 10 mbar.

The opening for withdrawal of the operating gas has a size between a few  $\text{cm}^2$  up to about  $100 \text{ cm}^2$  and it is a good idea to dimension the other openings in the box structure so that their sum is less than the size of the withdrawal opening.

- 10           The box structure can have a clear width in the range between 1 cm and 1 m and should have a size at least 1.2 times that of the objects and should be a maximum of 10 times as large as the objects. The objects that are to be modified or coated should fill the interior of the box structure to a volume of about 0.1% to 30%. The objects in the box structure should be electrically isolated from the structure, for  
15           example on one or more supports, and should have a distance of at least 0.1 to a maximum of 10 cm from the inner wall of the box structure.

Various metals can be used, for example, aluminum, titanium, or alloys of these. However, it is also possible to use metal compounds such as titanium nitride or indium-tin oxide.

- 20           The operating gas, especially for flushing and cleaning, can be a clean dry inert gas, for example argon. However, an operating gas mixture of an inert gas and a reactive gas can be used for coating. One such operating gas is, for example, argon and nitrogen, so that nitride layers can be deposited on the objects.

- 25           The gas flow can be adjusted to a minimum of  $10 \text{ cm}^3/\text{min}[\text{STP}]$  (cubic centimeters per minute at standard temperature and pressure) and a maximum of  $1000 \text{ cm}^3/\text{min}[\text{STP}]$ .

If only a very small coating or no coating at all is intended to be applied, the potential difference between the plasma and the box structure should be set to be under 200 V and/or the pressure should be increased by at least a factor of three.

- 30           With adjustment of this kind a surface modification, as already noted in general, can be carried out.

The device in accordance with the invention can also be used to produce composite structures. For this it is provided that a solid powder is supplied through one of the openings that are present or through an opening specifically made for this. It is also possible to place the solid powder in the device in a container. The particles  
5 of the solid powder preferably have a size from  $10^{-4}$  to  $10^{-9}$  m. Basically all known hard materials are possibilities as solid particles. Examples are high-melting metal oxides like corundum or titanium oxide. Diamond graphite or nitrides can also be used. In accordance with the method, when the powder is introduced via an opening, it is mixed into the inert gas stream. If the powder is supplied in a container,  
10 automatic turbulent mixing takes place due to the applied vacuum. The particles are then deposited on the surface that is to be coated.

The mode of operation in accordance with the invention will be described first below, in general form and then in more detail using two specific examples.

After putting the objects in the box structure, the box structure or the  
15 surrounding vacuum chamber is evacuated out by means of a vacuum pump and at the same time or shortly afterwards flushing with the operating gas is carried out.

If a sufficiently low pressure (1-10 mbar) has been achieved, the box structure is charged to a negative potential with respect to the plasma and the glow discharge is initiated by the supply of energy. The ion-supported desorption of the  
20 adsorbate layers takes place by means of this.

After sufficient cleaning the pressure is reduced to a pressure in the range between 0.001 and 1 mbar by reducing the feed of operating gas and the potential difference between the box structure and the plasma is increased. This can take place, for example, by increasing the negative potential, thus a higher negative  
25 voltage is supplied to the box structure. Due to this, material of the coating material is stripped from the inner wall of the flat structure and the objects in the structure are correspondingly coated. In each case according to the coating to be applied a pure inert gas or an inert gas-reactive gas mixture can be used as the operating gas. The fraction of reactive gas, however, must be established in correspondence with the  
30 desired layer structure.

Then the glow discharge can be switched off, the supply of operating gas in the pump disconnected and the vacuum chamber or the box structure flooded and after opening the box the modified or coated objects are removed.

The following Examples 1 and 2 are intended to describe on the one hand  
5 coating of objects with copper and on the other coating with titanium nitride in more specific detail.

#### Example 1

The objects are put into the box structure, which is shaped as a tube, is  
10 situated in a vacuum vessel, and consists of block copper. For evacuation of the vacuum vessel the vacuum pump is connected. At the same time flushing with argon at about  $100 \text{ cm}^3/\text{min}[\text{STP}]$  is carried out.

Upon reaching a pressure of 5 mbar the box structure is charged to a negative potential of 300 V compared to a rod shaped anode inserted into the box structure  
15 and the glow discharge is initiated. This causes the ion-supported desorption of the adsorbate layers from the inner wall of the box structure.

After sufficient cleaning the pressure is reduced to the operating pressure of 0.5 mbar by reducing the feed of gas and the potential of the box structure is set to – 500 V, so that coating of the objects with copper takes place.

20 After 10 min coating time the glow discharge is switched off by disconnecting the supply of current and the argon supply is turned off. The pump is disconnected and the box structure is aerated. The vacuum vessel and box structure are opened and the coated objects are removed.

#### 25 Example 2

The objects are put into the box structure. The box has the shape of a rectangular parallelepiped, consists of aluminum and is itself the vacuum vessel, which is coated nearly completely on its inside with titanium sheets ("targets"). The box structure has a short tubular stub in its wall, to which a microwave source is  
30 connected.

The vacuum pump is switched on for evacuation of the box. Shortly after that argon is supplied for flushing at about 300 cm<sup>3</sup>/min[STP]. Upon reaching a pressure of 10 mbar the box structure is charged to a negative potential of 250 V and the glow discharge is initiated by turning on the microwave source.

5 After 3 min cleaning the pressure is reduced to 0.3 mbar by reducing the gas supply, and the objects are supplied with a potential of -500 V, through which surface cleaning takes place. Then 10% nitrogen is added to the argon and the potential of the box structure is set to -600 V, so that coating of the objects with titanium nitride takes place.

10 After 15 min of coating the glow discharge is turned off and the operating gas supply stopped. The pump is isolated by a valve and the box is aerated. The box is opened and the objects are removed.

The organization of possible examples of a device in accordance with the invention is described in more detail below.

15 Here:

Figure 1 shows an example of a device in accordance with the invention with an inserted electrode for plasma generation, and

Figure 2 shows a second example of a device in accordance with the invention with an opening through which microwaves can be directed for plasma generation.

20 Figure 1 represents a box structure 1 with rectangular cross section. An end face 8 is formed as an opening through which objects 2 are introduced and can be removed. Opening 8 can, as shown, be reclosed. The operating gas can be introduced into the flat structure 1 through opening 3 and can be removed again through the larger and diametrically oppositely arranged opening 4.

Electrode 5, which is in this case connected as an anode, is inserted via an additional opening 6'. Between anode 5 and the box structure 1 there is insulation, not shown, so that the potentials are separate from one another.

30 Figure 2 shows a cylindrical box structure 1, in which again several objects 2 are arranged on a support 7 insulated from the box structure 1. The upper face is again formed as a cover 8, which can be removed and reattached.

There is an opening 6 in cover 8, through which microwaves can be directed into the interior of the box structure 1 and a plasma can be generated.

In this example there are two openings 3 in the outer jacket surface, through which operating gas can be introduced into the interior of the box structure 1. The  
5 gas can be removed through opening 4, which in this example is combined with a support, from the box structure 1.

10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205  
2206  
2207  
2208  
2209  
2210  
2211  
2212  
2213  
2214  
2215  
2216



### Claims

1. A device for coating and/or surface modification of objects in a vacuum, by means of a plasma, which is characterized by the fact that a box structure (1) of an electrically conductive material forms a vacuum chamber or can be inserted into a vacuum chamber, into which objects (2) are inserted into the box structure (1) through at least one closable opening (8) at a distance from the inner wall, at least one opening (3) for supply and at least one opening (4) for removal of operating gas and an opening (6,6') for introduction of energy for generation of a glow discharge are present, and the box structure (1) has a potential that is electrically negative with respect to the plasma generated by the glow discharge.

2. A device as in Claim 1, which is characterized by the fact that an electrode (5), to which a DC or AC voltage is applied for plasma generation, is inserted into the box structure (1) through an opening (6').

3. A device as in Claim 1, which is characterized by the fact that microwaves for plasma generation are directed into the interior of the box structure through opening (6).

4. A device as in one of Claims 1-3, which is characterized by the fact that the objects (2) are arranged in electrically isolated fashion from the box structure (1).

5. A device as in one of Claims 1-4, which is characterized by the fact that the objects (2) are supplied with a settable electrical potential.

6. A device as in one of Claims 1-5, which is characterized by the fact that the inner wall of the box structure (1) or the box structure (1) is formed of a coating material or is arranged there as a flat target.

7. A device as in one of Claims 1-6, which is characterized by the fact that the box structure (1) is cooled.

8. A device as in one of Claims 1-7, which is characterized by the fact that the clear width of the box structure (1) is at least 1.2 times that of the objects (2) and the objects (2) fill the space available in the box structure (1) to a percentage of 0.1% to 30%.

9. A device as in one of Claims 1-8, which is characterized by the fact that the size of the withdrawal opening (5) is larger than the sum of the larger of the other openings (3,6,6') of the box structure (1).

10. A device as in one of Claims 1-9, which is characterized by the fact that the box structure (1) or its inner surface consists of a metal, a metal alloy or a metal compound.

11. A method for coating and/or modification of the surfaces of objects with a device as in one of Claims 1-10, which is characterized by the fact that after evacuation to a sufficiently low pressure and flushing with an operating gas a plasma is generated in the box structure (1), where the plasma power and the negative potential of the box structure (1) are set so that modification of the surface and/or, through material stripping from the inner wall of the box structure (1), coating of the surface of the object (2) is carried out.

12. A method as in Claim 11, which is characterized by the fact that before modification or coating an ion-supported desorption of deposited adsorbate layers is carried out with applied negative potential applied to the box structure (1) and glow discharge initiated.

13. A method as in Claim 11 or 12, which is characterized by the fact that reactive gas is supplied during the coating.

14. A method as in one of Claims 11-13, which is characterized by the fact that solid powder is introduced into the box structure and/or is made available in a container arranged there and the solid powder is deposited on the surface (2) of the objects.

15. A method as in one of Claims 12-14, which is characterized by the fact that the potential difference between the box structure (1) and the plasma is set in the range between 100-1000 V.

16. A method as in one of Claims 12-15, which is characterized by the fact that the operating gas is adjusted to a volume flow of  $10\text{-}1000\text{ cm}^3/\text{min}[\text{STP}]$ .



17. A method as in one of Claims 12-16, which is characterized by the fact that for surface modification the potential difference between the plasma and the box structure (1) is adjusted to less than 200 V and/or the pressure is increased by at least threefold.

18. A method as in one of Claims 12-17, which is characterized by the fact that a hollow cathode flow discharge is formed in the box structure (1).

19. A method as in one of Claims 11-18, which is characterized by the fact that an inner gas, reactive gas or a mixture of inert and reactive gas is introduced in a timewise defined fashion as the working gas into the box structure (1).

### Summary

The invention concerns a device and a method for coating and/or surface modification of objects in a vacuum using a plasma, where there is the possibility of coating or modifying variform objects on all sides without a large expense for plant or process engineering being necessary. In accordance with the invention, a box structure (1) of an electrically conductive material that forms a vacuum chamber or can be inserted into a vacuum chamber is used. Objects (2) can be introduced into the box structure to at least one closable opening (8) at a distance from the inner wall. In addition, there are at least one opening (3) for supply and at least one opening (4) for removal of the operating gas as well as one opening (6,6') for introduction of energy for generation of a glow discharge and the box structure (1) has a potential that is electrically negative with respect to the plasma generated by the glow discharge.

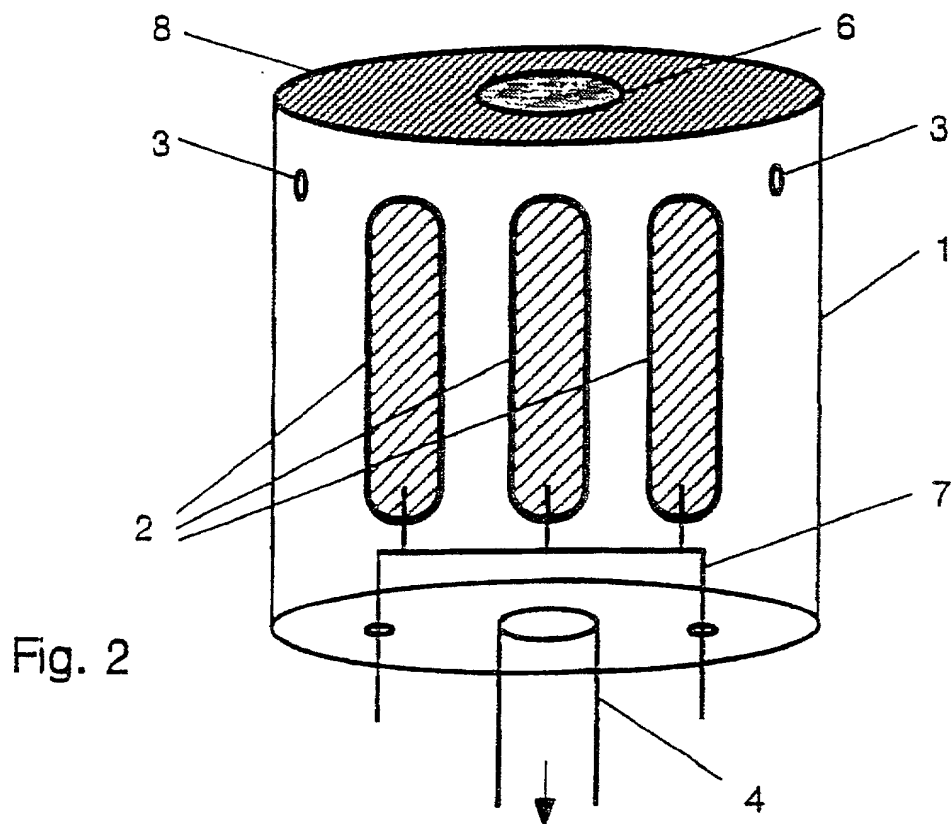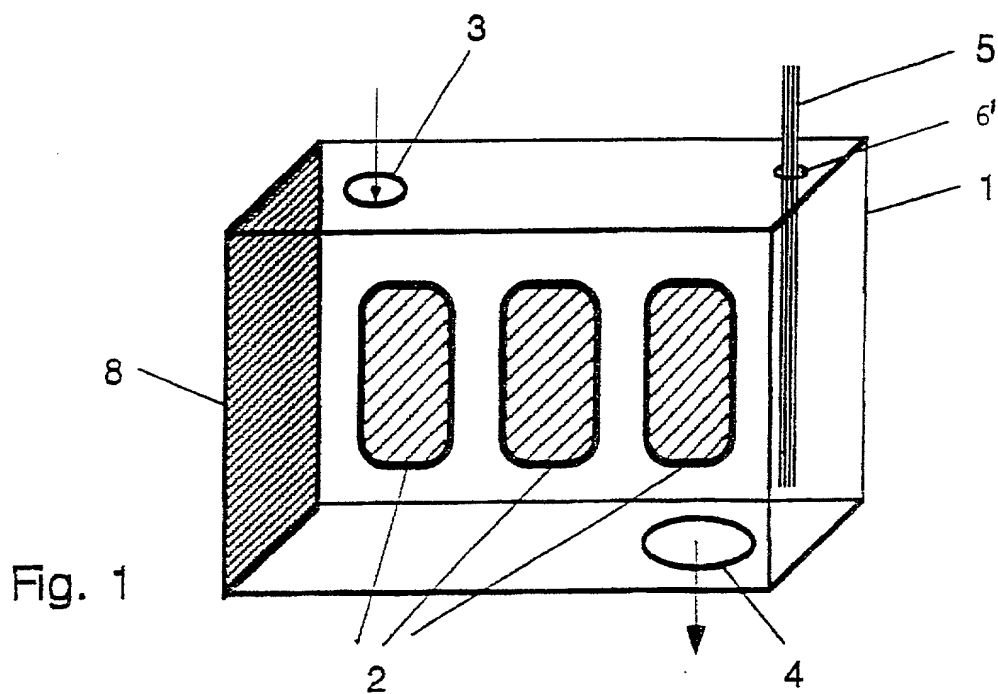

Docket No.  
65,243-001

# Declaration and Power of Attorney For Patent Application

## English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

DEVICE AND METHOD FOR THE VACUUM PLASMA PROCESSING OF OBJECTS

the specification of which

(check one)

☐ is attached hereto.

☒ was filed on January 10, 2001 as United States Application No. or PCT International Application Number 09/743,545 and was amended on \_\_\_\_\_

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

<u>198 34 733.2</u>	<u>GERMANY</u>	<u>31/July/1988</u>	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	
_____	_____	_____	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	
_____	_____	_____	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

PCT/EP99/05409

28/July/1999

Pending

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Status)  
(patented, pending, abandoned)

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Status)  
(patented, pending, abandoned)

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Status)  
(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Harold W. Milton	<u>22,180</u>	Jeffrey A. Sadowski	<u>29,005</u>
William H. Honaker	<u>31,623</u>	Raymond E. Scott	<u>22,981</u>
Bharat C. Gandhi	<u>35,146</u>	Randall L. Shoemaker	<u>43,118</u>
Samuel J. Haidle	<u>42,619</u>	Steve C. Wichmann	<u>37,758</u>
David M. LaPrairie	<u>46,295</u>	James R. Yee	<u>34,460</u>
Kevin S. MacKenzie	<u>45,639</u>		

Send Correspondence to:

Harold W. Milton  
HOWARD & HOWARD ATTORNEYS, P.C.  
The Pinehurst Office Center, Suite #101  
39400 Woodward Avenue  
Bloomfield Hills, MI 48304-5151

Direct Telephone Calls to: (name and telephone number)

Harold W. Milton, (248) 723-0352

Full name of sole or first inventor	February 21, 2001
Thomas Jung	
Sole or first inventor's signature	Date
<i>Thomas Jung</i>	
Residence	
Im Kamp 14, 38173 Hotzum, Germany	
Citizenship	
Germany	
Post Office Address	
IM Kamp 14, 38173 Hotzum, Germany	

Full name of second inventor, if any
Second inventor's signature
Date
Residence
Citizenship
Post Office Address